


# Fluorescent Drawstrings

## Catalog

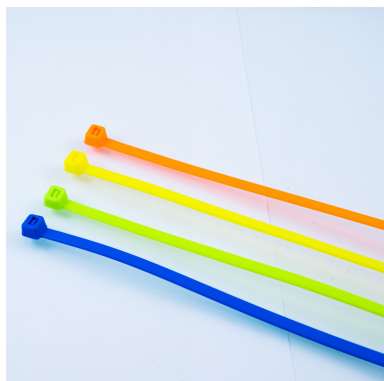

**Single Use** : Yes

**Material** : PA6,6

**Diameter / Strap width** : 4.8 mm et 7.6 mm

**Total length** : de 200 à 370 mm

**Colours available on stock** : Bleu Fluo / Vert Fluo / Jaune Fluo / Orange Fluo / Rose Fluo

**Pull apart force** : 22 kg et 54 kg

**Metal insert** : No

**Closure type** : Progressive tightening

**Ex stock** : Yes

**Standard packaging** : 100 pcs bags

**Delivery time for personalised product** : 3 to 4 weeks

**MOQ for stock product** : 1.000 pcs

**MOQ personalised products** : 1000 pcs

**HS Code** : 39 23 90 90

**Food compatible** : No

**Detectable** : No

Manufactured in poliamida 6.6 and free of halogens, these drawstrings are fire resistant (UL94V2), have good resistance to bases, oils, greases, petroleum derivatives, solvents and withstand temperatures from -40°C to 80°C.

The fluorescent colors offer an extra range of color-coding alternatives, but are also suitable for identification in low-light areas.

For better tightening, use a plastic backing PP2 or a metal backing PM1 or PCP12GL.

Dimensions (mm)	Maximum clamping diameter (mm)	Tensile strength
4.8 x 200	50	22 kg
4.8 x 300	80	22 kg
4.8 x 370	102	22 kg
7.6 x 370	102	55 kg

They can be personalized with hot or laser stamping depending on the shades, in our workshop (name, numbering).

In order to preserve the mechanical properties of the drawstrings, store them away from light in their packaging and in a temperate place.

The dimensions may vary by a small % depending on the batches, without changing the mechanical properties.

Our quantities may vary by +/-1%

