


Fluorescent Drawstrings

Catalog

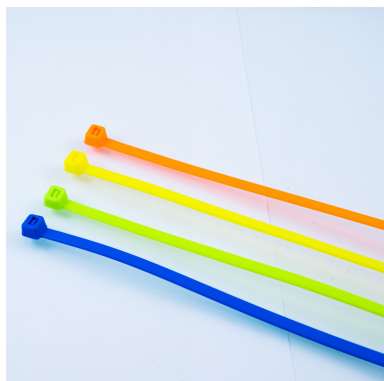

Single Use : Yes

Material : PA6,6

Diameter / Strap width : 4.8 mm et 7.6 mm

Total length : de 200 à 370 mm

Colours available on stock : Bleu Fluo / Vert Fluo / Jaune Fluo / Orange Fluo / Rose Fluo

Pull apart force : 22 kg et 54 kg

Metal insert : No

Closure type : Progressive tightening

Ex stock : Yes

Standard packaging : 100 pcs bags

Delivery time for personalised product : 3 to 4 weeks

MOQ for stock product : 1.000 pcs

MOQ personalised products : 1000 pcs

HS Code : 39 23 90 90

Food compatible : No

Detectable : No

Manufactured in poliamida 6.6 and free of halogens, these drawstrings are fire resistant (UL94V2), have good resistance to bases, oils, greases, petroleum derivatives, solvents and withstand temperatures from -40°C to 80°C.

The fluorescent colors offer an extra range of color-coding alternatives, but are also suitable for identification in low-light areas.

For better tightening, use a plastic backing PP2 or a metal backing PM1 or PCP12GL.

| Dimensions (mm) | Maximum clamping diameter (mm) | Tensile strength |
|-----------------|--------------------------------|------------------|
| 4.8 x 200 | 50 | 22 kg |
| 4.8 x 300 | 80 | 22 kg |
| 4.8 x 370 | 102 | 22 kg |
| 7.6 x 370 | 102 | 55 kg |

They can be personalized with hot or laser stamping depending on the shades, in our workshop (name, numbering).

In order to preserve the mechanical properties of the drawstrings, store them away from light in their packaging and in a temperate place.

The dimensions may vary by a small % depending on the batches, without changing the mechanical properties.

Our quantities may vary by +/-1%

